

# TELESCOPIC



US300V-8  
with 80800TLZ27 and GA29910XI



US100 with 80800C



US300  
with 80800UALZ29 and GA29910XI



US400 with BC111T11-I and GB29910XI

# C O L U M N S

For *Union Special*® High Performance Bag Closing Machines


## APPLICATION

For mounting and operation of Union Special® heavy duty bag closing sewing machines; for plain, taped, or fold over sewn closures of bags made from multi-wall paper, woven poly, burlap, jute, and other bag materials.

## DIMENSIONS & SPECIFICATIONS

SIZE: As shown, right.

ELECTRICAL: Available in 110V, 220V, 380V & 440V  
1/2 hp, TEFC motors.

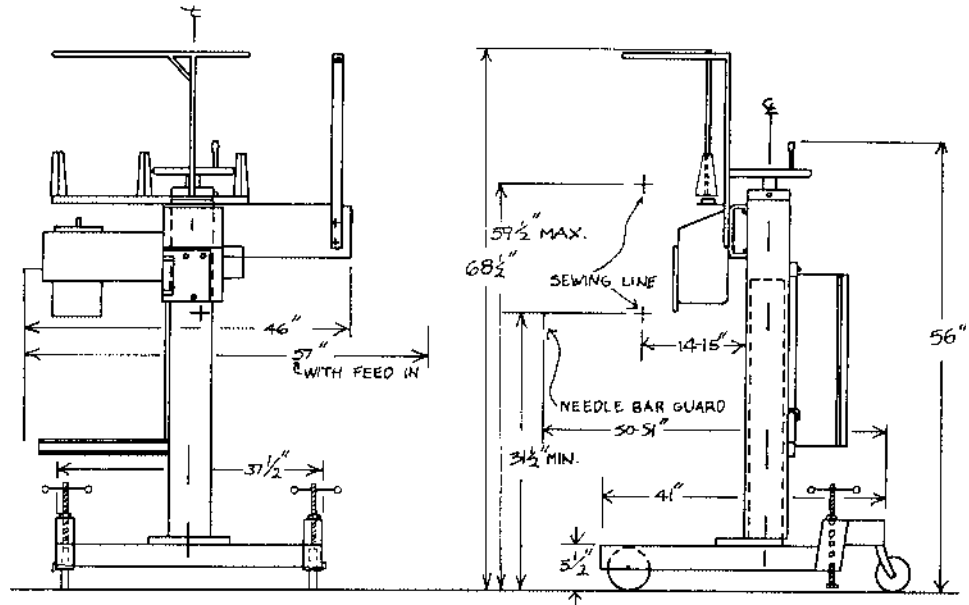


## MODELS

- US100-Basic pedestal with sewing motor, electric controls and movable base, for use with standard sewing heads 80800C&H.
  - US100F-Same as US100 except fit with flat belt conveyor.
  - US100V-Same as US100 except fit with V-trough conveyor.
- US300-Pedestal with brake motor electric controls, photo-cell start/stop, pneumatic activating of chain or tape cutters, and movable base; for use with auto feed in devices.
  - US300F-Same as US300 except fit with flat belt conveyor.
  - US300V-Same as US300 except fit with V-trough conveyor.
- US400-Similar to US300, except fit with 1 hp pneumatic clutch sewing motor. For use with high-speed, BC111 Class machines.
  - US400F-Same as US400 except fit with flat belt conveyor.
  - US400V-Same as US400 except fit with V-trough conveyor.

## FEATURES & BENEFITS

- Telescopic column with handwheel height adjustment has square instead of round construction to reduce unwanted twisting of column.
- Rugged construction for long life and trouble free operation.
- Movable base standard with pedestal.
- Swing out sewing machine mounting plate for easy access to machine for threading, inspection and maintenance work.
- Thread stand large enough for up to two 18-20 pound cones of thread and one cone of filter cord.
- Available as double-head system.
- Available with or without flat belt or V-trough conveyor.
- Available with thread break detectors.

**Available From:**

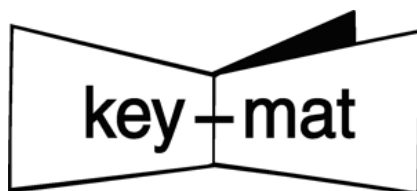

1.866.879.665 • [info@key-mat.com](mailto:info@key-mat.com)  
[www.key-mat.com](http://www.key-mat.com)